



// ONE BRAND // ONE SOURCE // ONE SYSTEM

Rubber Cut 414 Regroover 115V

Ergonomic handle design makes working with this tool easier and reduces hand-fatigue. An 8-position heat control modulates cutting intensity resulting in fast and accurate regrooving.

- Ergonomic design for fatigue-proof regrooving
- 4-step temperature switch on main transformer with MIN/MAX-selector allows 8 heating levels for different cutting speeds
- Automatic overheating cutout according to DIN 30600
- Insulated cutting head
- Greater freedom of movement and easy guiding due to separation of handle and transformer
- Cutting width with FIX regrooving blades 0.118" to 1.102" (3 - 28 mm)
- Prepared for wall mounting
- GS-tested, meets recognized safety standards




Blades are not included.

Rubber Cut 414 Regroover - Cutting Blades

R Fix = round blade, W Fix = angle blade.

Part No	Description	Cutting width (mm)	Cutting depth (mm)	Box/Qty
R-1	R Fix 1	3 - 4	max. 7	20
R-2	R Fix 2	5 - 6	max. 8	20
R-3	R Fix 3	6 - 8	max. 10	20
R-4	R Fix 4	9 - 10	max. 14	20
R-5	R Fix 5	10 - 14	max. 16	20
W-1	W Fix 1	3 - 4	max. 7	20
W-2	W Fix 2	5 - 6	max. 8	20
W-3	W Fix 3	6 - 8	max. 10	20
W-4	W Fix 4	9 - 10	max. 14	20
W-5	W Fix 5	10 - 14	max. 16	20
W-6	W Fix 6	22 - 28	max. 16	10

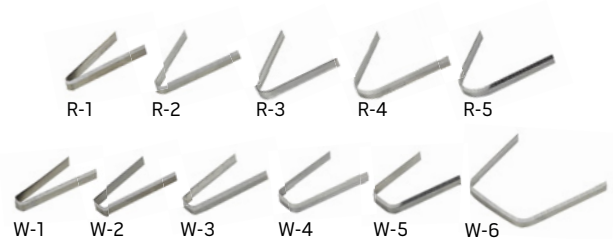

REMA TIP TOP/North America, Inc.

1500 Industrial Blvd. • Madison, GA 30650 • Toll Free 800.334.REMA (7362) • Phone 706.752.4000 • Fax 706.752.4015 → www.rematiptop.com