


The highly tear-resistant lining

# REMALINE 50

Our high-quality **REMALINE** lining offers optimum surface protection for your machines and equipment. You avoid unnecessary costs for maintenance and downtime, thereby increasing the productivity of your equipment many times over.

## Application areas

**REMALINE 50** is suitable for wet and dry applications based on its excellent properties. Thanks to its great elasticity and high tear resistance, it is especially useful for lining pipes, chutes and tanks in power plants and gravel works. Furthermore, it can be used on non-driven pulleys to prevent build-up.

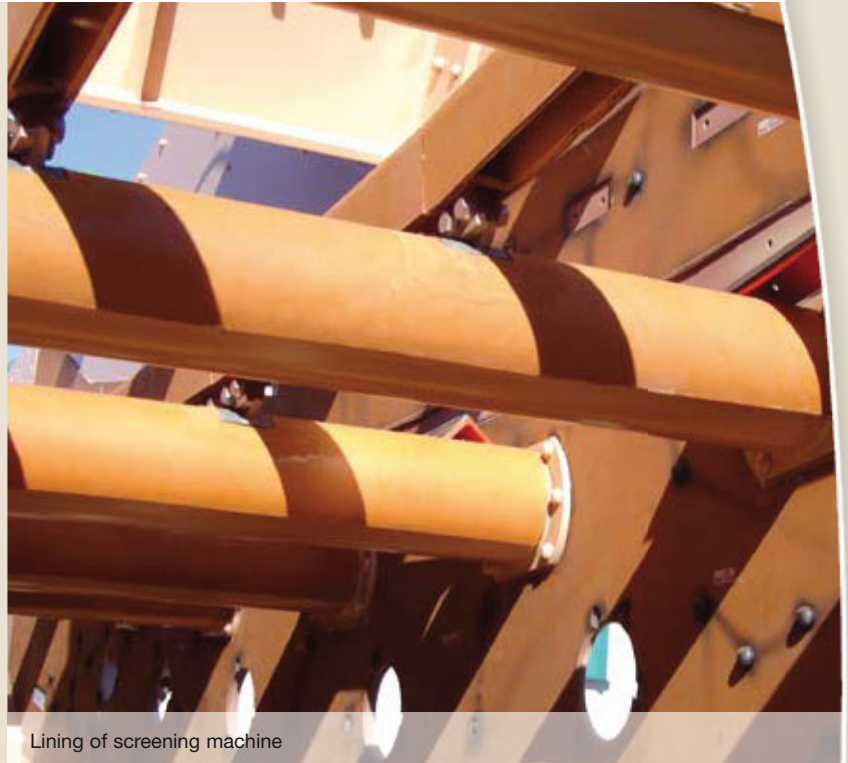

Lining of screening machine



## Typical fields of use

- Lining for chutes, tanks and outlet funnels
- Coating for non-driven pulleys (build-up protection)
- Lining for pipes (cooling water in power plants)

## Advantages

- Safe protection from wet, sharp-edged material
- Also excellent as build-up protection
- Easy and fast installation
- Technical consultation and data available anytime
- ▶ **Increases the efficiency of your equipment**

The highly tear-resistant lining

# REMALINE 50

## Technical properties

<b>Product characteristics</b>	<b>REMALINE 50</b> is a natural, highly tear-resistant rubber offering great protection from wet abrasion.	
	CN bonding layer: <b>REMALINE 50</b> comes equipped with a CN bonding layer which affords the product an extremely good adhesive quality in combination with the <b>REMA TIP TOP</b> adhesive systems.	
<b>Storage stability</b>	Max. 24 months ▶ At 25 °C ± 2 °C with no loss in quality. Subject to DIN regulation 7716.	
<b>Color</b>		orange
<b>Polymer</b>	DIN ISO 1629	NR
<b>Specific weight</b>	DIN EN ISO 1183	1,08 g/cm <sup>3</sup>
<b>Hardness</b>	ISO 868-2003 (DIN 53505)	50 ± 5 Shore A
<b>Abrasion</b>	DIN ISO 4649-2006	130 mm <sup>3</sup>
<b>Resilience elasticity</b>	ISO 4462-1986 (DIN 53512)	73 %
<b>Available sizes*</b>	Standard thickness in mm	3 - 20
	Standard width in mm	1 500 or 2 000

\*Other dimensions available on request.

**REMA TIP TOP/North America Inc  
Industrial Division**

1500 Industrial Blvd.  
Madison, GA 30650

Toll Free: 800.334.REMA (7362)

Phone: 706.752.4000

Fax: 706.752.4015

www.rematiptop.com

ONE BRAND – ONE SOURCE – ONE SYSTEM

