


RAD 100 Series Section Repair Chart

					RAD No.								
	max. A mm	max. R mm	max. A inch	max. R inch		max. C Ø mm	max. A x R mm	max. C Ø inch	max. A x R inch	max. S mm	max. S inch	max. S mm	max. S inch
8.25 - 10.00 9 R - 11 R 11/ 235/ - 285/	-	-	-	-	115	8	8 x 8	3/8	3/8 x 3/8	-	-	-	-
	6	10	1/4	3/8	120	10	10 x 15	3/8	3/8 x 5/8	8	3/8	-	-
	10	80	3/8	3 1/4	140	20	20 x 40	3/4	3/4 x 1 5/8	15	5/8	-	-
	20	60	3/4	2 3/8									
	10	110	3/8		142	30	30 x 50	1 1/4	1 1/4 x 1 1/4	20	3/4	-	-
	25	80	1	3 1/4									
	20	130	3/4		144	40	40 x 70	1 5/8	1 5/8 x 2 3/4	25	1	-	-
	40	80	1 5/8	3 1/4									
	-	-	-	-	125	15	15 x 25	5/8	5/8 x 1	-	-	-	-
	-	-	-	-	135	25	25 x 35	1	1 x 1 3/8	-	-	-	-
	-	-	-	-	145	40	40 x 60	1 5/8	1 5/8 x 2 3/8	-	-	-	-
	1 Cable	80	1 Cable	3 1/4	124	-	-	-	-	-	-	-	-
	2 Cables	60	2 Cables	2 3/8									
	1 Cable	120	1 Cable	4 3/4	126	-	-	-	-	-	-	-	-
	3 Cables	60	3 Cables	2 3/8									
11.00-13.00 12 R - 15 R 12/ - 13/ 295/ - 365/	-	-	-	-	115	8	8 x 8	3/8	3/8 x 3/8	-	-	-	-
	6	6	1/4	1/4	120	10	10 x 10	3/8	3/8 x 3/8	6	1/4	-	-
	10	60	3/8	2 3/8	140	15	15 x 20	5/8	5/8 x 5/8	10	3/8	-	-
	15	35	5/8	1 3/8									
	10	100	3/8	4	142	25	25 x 50	1	1 x 1	20	3/4	-	-
	25	80	1	3 1/4									
	20	130	3/4	5 1/4	144	40	40 x 70	1 5/8	1 5/8 x 1 5/8	25	1	-	-
	40	80	1 5/8	3 1/4									
	-	-	-	-	125	10	10 x 20	3/8	3/8 x 3/4	-	-	-	-
	-	-	-	-	135	20	20 x 30	3/4	3/4 x 1 1/4	-	-	-	-
	-	-	-	-	145	40	40 x 60	1 5/8	1 5/8 x 2 3/8	-	-	-	-
	1 Cable	120	1 Cable	4 3/4	126	-	-	-	-	-	-	-	-
	3 Cables	60	3 Cables	2 3/8									
	1 Cable	140	1 Cable	5 1/2	128	-	-	-	-	-	-	-	-
	2 Cables	80	2 Cables	3 1/4									
14.00 - 16.5 R - 15.5/ - 385/ - max. LI 177	-	-	-	-	120	8	8 x 8	3/8	3/8 x 3/8	-	-	-	-
	12	30	1/2	1 1/4	140	12	12 x 12	1/2	1/2 x 1/2	10	3/8	-	-
	10	100	3/8	4	142	20	20 x 30	3/4	3/4 x 1 1/4	20	3/4	-	-
	20	60	3/4	2 3/8									
	20	130	3/4	5 1/4	144	30	30 x 50	1 1/4	1 1/4 x 2	25	1	-	-
	30	60	1 1/4	2 3/8	146	40	40 x 70	1 5/8	1 5/8 x 2 3/4	30	1 1/4	-	-
	40	100	1 5/8	4									
	1 Cable	120	1 Cable	4 3/4	126	-	-	-	-	-	-	-	-
	3 Cables	60	3 Cables	2 3/8									
	1 Cable	140	1 Cable	5 1/2	128	-	-	-	-	-	-	-	-
2 Cables	80	2 Cables	3 1/4										

This is the repair chart valid at the time of printing.

Always refer to the repair chart and safety advice packed with the product!

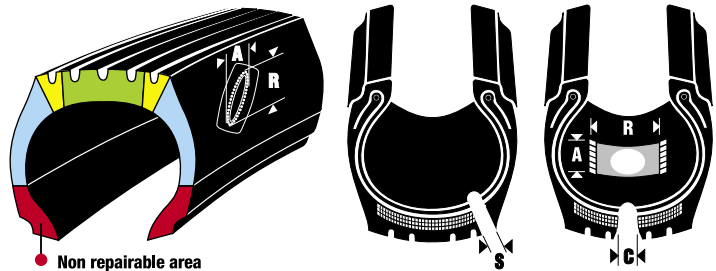

RAD 100 Series Section Repair Chart

Vmax 30mph									RAD No.								
Standard 100-90	Series 85-80	Series 75-70	Series 65-60	Series 55-45	max A mm	max R mm	max A inch	max R inch		max. C Ø mm	max. A x R mm	max. C Ø inch	max. A x R inch	max. S mm	max. S inch	max. S mm	max. S inch
8.3-12.4 180/-270/	275/-320/	200/-360/	320/-340/	Series 55-45	-	-	-	-	115	12	12 x 12	½	½ x ½	-	-	-	-
					20	20	¾	¾	120	20	20 x 30	¾	¾ x 1¼	10	¾	¾	¾
					50	70	2	2¾	180	40	40 x 60	1½	1½ x 2¾	25	1	1	1
					60	100	2¼	4	182	60	60 x 75	2¾	2¾ x 3	45	1¼	1¼	1¼
					100	75	4	3	184	75	75 x 90	3	3 x 3½	55	2½	2½	2½
					60	125	2¾	5	184	75	75 x 90	3	3 x 3½	55	2½	2½	2½
					100	80	4	3¼	184	75	75 x 90	3	3 x 3½	55	2½	2½	2½
13.6-18.4 12-15	335/-420/	375/-520/	420/-540/	Series 55-45	-	-	-	-	115	10	10 x 10	¾	¾ x ¾	-	-	-	-
					15	25	⅝	1	120	15	15 x 15	⅝	⅝ x ⅝	10	¾	¾	¾
					40	60	1½	2¾	180	30	30 x 50	1¼	1¼ x 2	20	¾	¾	¾
					60	40	2¾	1½	180	30	30 x 50	1¼	1¼ x 2	20	¾	¾	¾
					60	100	2¾	4	182	60	60 x 70	2¾	2¾ x 2¾	40	1½	1½	1½
					85	70	3¾	2¾	184	80	80 x 100	3¼	3¼ x 4	50	2	2	2
					75	125	3	5	184	80	80 x 100	3¼	3¼ x 4	50	2	2	2
					100	75	4	3	184	80	80 x 100	3¼	3¼ x 4	50	2	2	2
					90	140	3½	5½	186	100	100 x 140	4	4 x 5½	75	3	3	3
					125	110	5	4¾	186	100	100 x 140	4	4 x 5½	75	3	3	3
					100	200	4	8	188	125	125 x 150	5	5 x 6	80	3¼	3¼	3¼
20.8-30.5	460/-	540/-710/	600/-800/	700/-1050/	10	20	¾	¾	120	10	10 x 10	¾	¾ x ¾	10	¾	¾	¾
					25	60	1	2¾	180	25	25 x 40	1	1 x 1½	10	¾	¾	¾
					40	100	1½	4	182	40	40 x 60	1½	1½ x 2¾	30	1¼	1¼	1¼
					60	125	2¾	5	184	70	70 x 90	2¾	2¾ x 3½	40	1½	1½	1½
					85	75	3¾	3	184	70	70 x 90	2¾	2¾ x 3½	40	1½	1½	1½
					85	120	3¾	4¾	186	85	85 x 120	3¾	3¾ x 4¾	60	2½	2½	2½
					120	80	4¾	3¼	186	85	85 x 120	3¾	3¾ x 4¾	60	2½	2½	2½
					90	180	3½	7½	188	100	100 x 175	4	4 x 6¾	70	2¾	2¾	2¾
					125	125	5	5	188	100	100 x 175	4	4 x 6¾	70	2¾	2¾	2¾
					160	200	6¼	8	190	125	125 x 150	5	5 x 6	-	-	-	-
					125	250	5	10	190	125	125 x 150	5	5 x 6	-	-	-	-

Vmax 25mph									RAD No.								
Standard 100-90	Series 85-80	Series 75-70	Series 65-60	Series 55-45	max A mm	max R mm	max A inch	max R inch		max. C Ø mm	max. A x R mm	max. C Ø inch	max. A x R inch	max. S mm	max. S inch	max. S mm	max. S inch
5.00-7.00	Series 85-80	150/-200/	Series 65-60	Series 55-45	-	-	-	-	115	6	6 x 6	¼	¼ x ¼	-	-	-	-
					10	10	¾	¾	120	10	10 x 10	¾	¾ x ¾	6	¼	¼	¼
					10	50	¾	2	122	10	10 x 20	¾	¾ x ¾	6	¼	¼	¼
					15	30	⅝	1¼	122	10	10 x 20	¾	¾ x ¾	6	¼	¼	¼
7.50-10.00	Series 85-80	225/-315/	250/-355/	Series 55-45	-	-	-	-	115	3	3 x 3	⅛	⅛ x ⅛	-	-	-	-
					8	10	¾	¾	120	10	10 x 10	¾	¾ x ¾	6	¼	¼	¼
					8	30	¾	1¼	122	10	10 x 15	¾	¾ x ¾	6	¼	¼	¼
					18	70	1¼	2¾	140	18	18 x 30	1¼	1¼ x 1¼	10	¾	¾	¾
					15	50	⅝	2	140	18	18 x 30	1¼	1¼ x 1¼	10	¾	¾	¾
					18	70	1¼	2¾	142	25	25 x 35	1	1 x 1¾	12	½	½	½
					25	50	1	2	142	25	25 x 35	1	1 x 1¾	12	½	½	½

This is the repair chart valid at the time of printing.
Always refer to the repair chart and safety advice packed with the product!

