




// ONE BRAND // ONE SOURCE // ONE SYSTEM

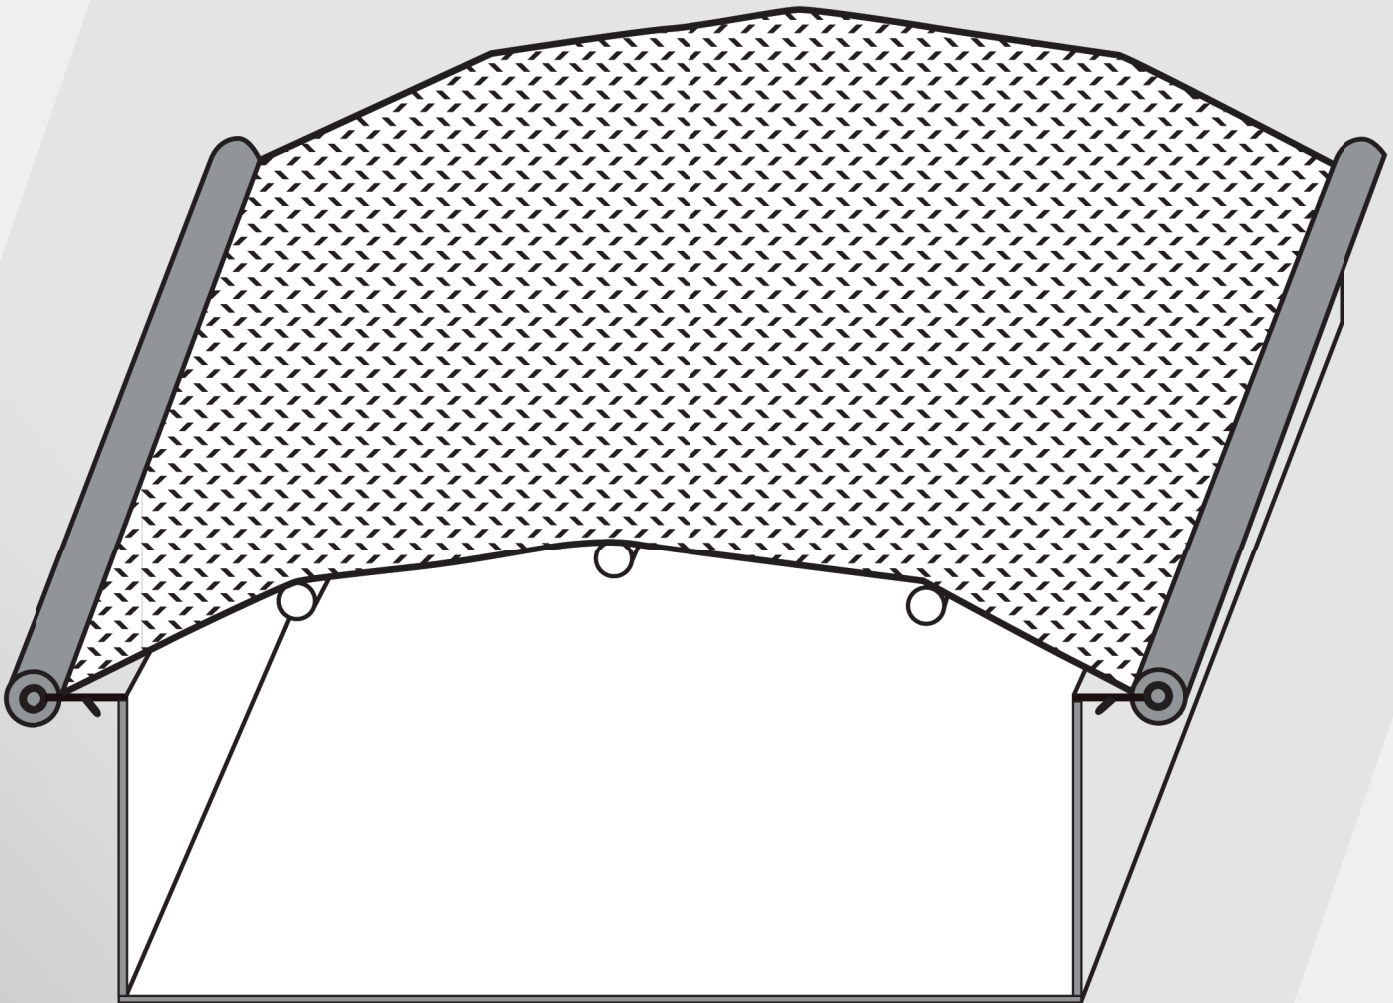

## REMA TIP TOP - REMADUST

REMADUST is a dust sealing system which minimizes dust emissions and reduces noise levels.

# REMADUST

## PRODUCT OVERVIEW

- Significant reduction of dust content
- Highly elastic
- High tear growth resistance
- Good resistance to weather
- Simple to fit using clamping profiles
- Minimal maintenance costs
- Reduced amount of extraction air required

## TYPICAL APPLICATIONS

- Screening machines
- Conveyor systems
- Bulk Material transport installations

## TECHNICAL DATA

		REMADUST
Polymer Basis	DIN ISO 1629	NR/IR
Specific Weight	DIN EN ISO 1183-1	0.97 g/cm <sup>3</sup>
Hardness	DIN ISO 7619.1	33 Shore A
Color		Black
Elongation		800%
Resilience		75%




Clamping profile




90° clamping profile, internal groove



90° clamping profile, external groove

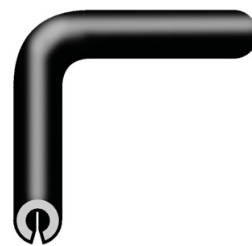

90° clamping profile, groove on bottom side

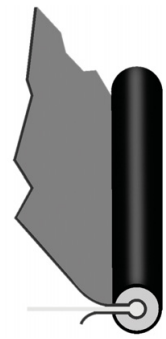

Clamping profile system

Mounts on 10mm round steel with inside diameter of 14 mm, outside diameter of 31 mm

## SYSTEM PARTS

Part Number	Description	Size	Bend Angle
549 4439	REMADUST 25	5/64" x 53" x 66'	n/a
549 4446	TT Clamping Profile	114"	n/a
549 4453	TT 90° corner, internal groove	8" x 8"	90°
549 4460*	TT 90° corner, external groove	8" x 8"	90°
549 4477*	TT 90° corner, groove on underside	8" x 8"	90°

\* Denotes non-stock item, special order required. Typical lead time of 10-12 weeks.

## REMA TIP TOP/North America, Inc.

1500 Industrial Blvd. • Madison, GA 30650 • Phone 800.334.REMA (7362) • 706.752.4000 • Fax 706.752.4015 → [www.rematiptop.com](http://www.rematiptop.com)