




// ONE BRAND // ONE SOURCE // ONE SYSTEM

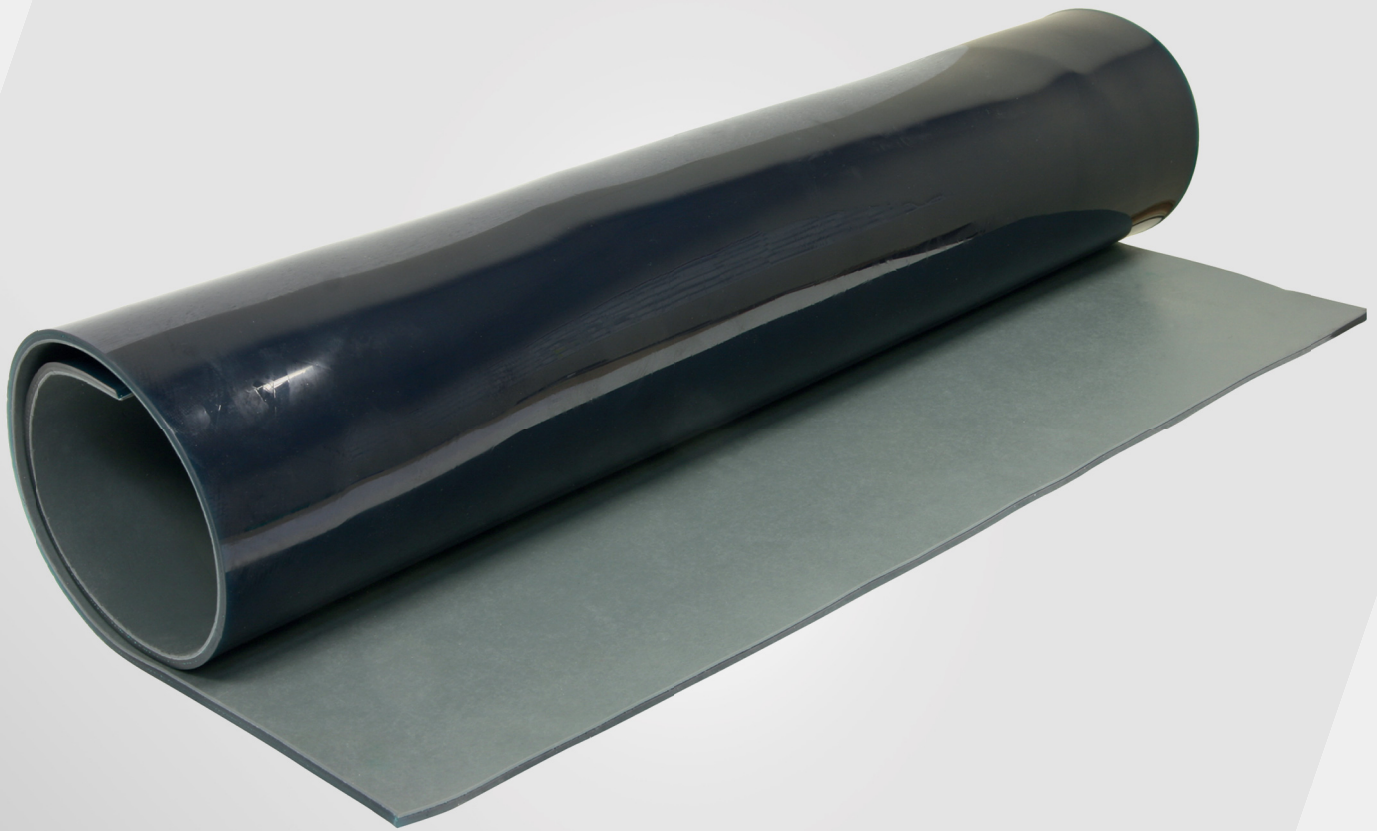

REMA TIP TOP - REMATHAN

High quality polyurethane lining material with extremely high wear, oil, and grease resistance.

REMATHAN

PRODUCT OVERVIEW

- Excellent resistance to wear
- Oil & grease resistance
- Resists hydrolysis
- Resists microbes
- High impact elasticity
- High notch value
- CN bonding layer provides fast and strong adhesions

TYPICAL APPLICATIONS

- Oil, Grease, and wear resistant lining
- Prevents caking and noise
- Slides & Chutes
- Slip ground containers
- Concrete discharge chutes

TECHNICAL DATA

		REMATHAN G 65/CN	REMATHAN G 75/CN	REMATHAN G 90/CN
Polymer Basis	DIN ISO 1629	PUR	PUR	PUR
Specific Weight	DIN EN ISO 1183-1	1.22 g/cm ³	1.22 g/cm ³	1.23 g/cm ³
Hardness	DIN ISO 7619.1	65 Shore A	75 Shore A	90 Shore A
Color		Green	Green	Green
Temperature Range		-22°F to 176°F	-22°F to 176°F	-22°F to 176°F
Abrasion	DIN ISO 4649	25 mm ³	29 mm ³	39 mm ³
Tensile Strength	DIN 53 504	3625 psi	3916 psi	3480 psi
Elongation at Break	DIN 53 504	490%	460%	450%
Resilience	DIN 53 512	42%	41%	41%
Tear Growth Resistance	ISO 34-1 METHOD A	68.5 lb/in	108.5 lb/in	217 lb/in

REPLACEMENT PARTS

Part Number	Description	Size	Part Number	Description	Size
573 2287	REMATHAN G 65/CN	3/8" x 55" x 33'	573 2342	REMATHAN G 75/CN	3/8" x 55" x 33'
573 2294	REMATHAN G 65/CN	5/8" x 55" x 33'	573 2359	REMATHAN G 75/CN	5/8" x 55" x 33'
573 2304	REMATHAN G 65/CN	3/4" x 55" x 33'	573 2366	REMATHAN G 75/CN	3/4" x 55" x 33'
573 0087	REMATHAN G 75/CN	1/8" x 55" x 33'	573 2380	REMATHAN G 90/CN	1/4" x 55" x 33'
573 2328	REMATHAN G 75/CN	1/4" x 55" x 33'	573 2407	REMATHAN G 90/CN	3/8" x 55" x 33'
573 2335	REMATHAN G 75/CN	5/16" x 55" x 33'	573 2060	REMATHAN G 90/CN	3/4" x 39" x 78'

* Denotes non-stock item, special order required. Typical lead time of 10-12 weeks.

The RMS System is available with a REMATHAN option. Contact REMA TIP TOP Sales 800.334.REMA (7362).

REMA TIP TOP/North America, Inc.

1500 Industrial Blvd. • Madison, GA 30650 • Phone 800.334.REMA (7362) • 706.752.4000 • Fax 706.752.4015 → www.rematiptop.com